

DATA SHEET

Product Name Wire-Wound Film Fixed Resistors

Part Name KNS Series

Uniroyal Electronics Global Co., Ltd.

88 Longteng Road, Economic & Technical Development Zone, Kunshan, Jiangsu, China

Tel +86 512 5763 1411 / 22 /33

Email marketing@uni-royal.cn

Manufacture Plant Uniroyal Electronics Industry (kunshan) co., ltd.
Uniroyal Electronics Industry Co., Ltd.
Uniroyal Electronics Global Co.,Ltd Shenzhen Branch
Aeon Technology Corporation
Uniroyal Electronics Global Co.,Ltd Xiamen Branch
Kunshan Foss Electronic material Co., Ltd.

Brands *RoyalOhm* *UniOhm*



1. Scope

- 1.1 This specification for approve relates Wire-Wound Film Fixed Resistors manufactured by UNI-ROYAL
- 1.2 Excellent flame retardant coating
- 1.3 Too low or too high ohmic value can be supplied on a case to basis
- 1.4 Non-inductive type available

2. Part No. System

The standard Part No. includes 14 digits with the following explanation:

- 2.1 Wire-Wound Fixed Resistors type, the 1st to 3rd digits are to indicate the product type and 4th digit is the special feature.

Example: KNS= Wire-Wound Fixed Resistors type.

- 2.2 5th~6th digits:

- 2.2.1 This is to indicate the wattage or power rating. To dieting the size and the numbers,

The following codes are used; and please refer to the following chart for detail:

W=Normal Size; “1”~“G”to denotes“1”~“16”as Hexadecimal:

1W~16W (\cong 1W)

Wattage	1	2	3	5	7	8	9	10	15
Normal Size	1W	2W	3W	5W	7W	8W	9W	AW	FW

- 2.2.2 For power of 1 watt to 16 watt, the 5th digit will be a number or a letter code and the 6th digit will be the letters of W, S or U.

Example: AW=10W; 3S=3W-S

- 2.3 The 7th digit is to denote the Resistance Tolerance. The following letter code is to be used for indicating the standard Resistance Tolerance.

J=±5% K= ±10%

- 2.4 The 8th to 11th digits is to denote the Resistance Value.

- 2.4.1 For the standard resistance values of E-24 series, the 8th digit is “0”, the 9th & 10th digits are to denote the significant figures of the resistance and the 11th digit is the number of zeros following.;

- 2.4.2 The following number s and the letter codes are to be used to indicate the number of zeros in the 11th digit:

0=10⁰ 1=10¹ 2=10² 3=10³ 4=10⁴ 5=10⁵
 6=10⁶ J=10⁻¹ K=10⁻² L=10⁻³ M=10⁻⁴

- 2.4.3 The 12th, 13th & 14th digits.

The 12th digit is to denote the Packaging Type with the following codes:

A=Tape/Box (Ammo pack) B=Bulk/Box

T=Tape/Reel P=Tape/Box of PT-26 products

- 2.4.4 The 13th digit is normally to indicate the Packing Quantity of Tape/Box & Tape/Reel packaging types. The following letter code is to be used for some packing quantities:

A=500pcs B=2500pcs C=10000pcs
 D=20000pcs G=25000pcs H=50000pcs

- 2.4.5 For the FORMED type products, the 13th & 14th digits are used to denote the forming types of the product with the following letter codes:


MF= M-type with flattened lead wire	F0= F-type
MK= M-type with kinked lead wire	F1= F1-type
ML= M-type with normal lead wire	F2= F2-type
MC= M-type with bending lead wire	F3= F3-type

- 2.4.6 For some items, the 14th digit alone can use to denote special features of additional information with the following codes:

P=Panasert type 1=Avisert type 1 2=Avisert type 2
 3=Avisert type 3 A=Cutting type CO 1/4W-A type B= Cutting type CO 1/4W-B type


3. Ordering Procedure

(Example: KNS 3W ±5% 100Ω B/B)

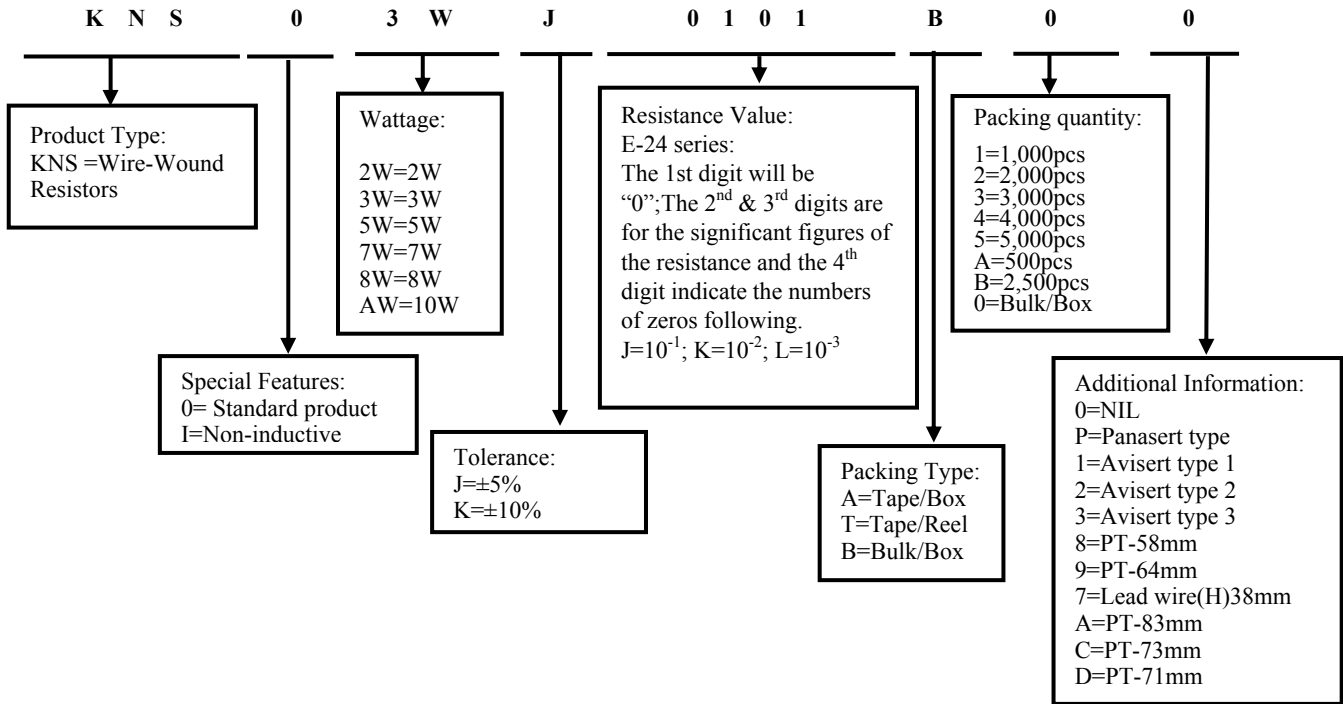

4. Marking

Example:

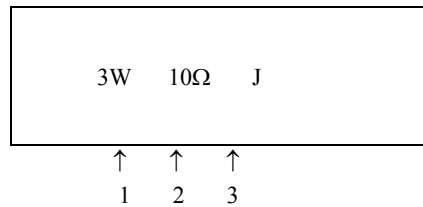


Code description and regulation:

1. Wattage Rating
2. Nominal Resistance Value
3. Resistance Tolerance. J: ± 5%
K: ± 10%


Color of marking: Black Ink

5. Ratings & Dimension

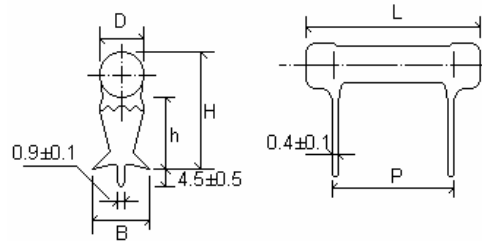

Type	Dimension(mm)						Tolerance	Resistance Range
	D±1.0	L±1.5	P±1.0	H±1.0	h±1.0	B±0.5		
KNS 2W	7.0	19.0	8	19	12	4.5	±5%、±10%	0.05Ω~470Ω
KNS 3W	7.0	21.0	10	19	13	4.5	±5%、±10%	0.068Ω~470Ω
KNS 5W	9.0	26.0	15	21.5	13	6.5	±5%、±10%	0.01Ω~750Ω
KNS 7W	9.0	31.0	20	21.5	13	6.5	±5%、±10%	0.1Ω~1.1KΩ
KNS 8W	9.0	41.0	30	21.5	13	6.5	±5%、±10%	0.2Ω~2.2KΩ
KNS 10W	9.0	54.0	43	21.5	13	6.5	±5%、±10%	0.3Ω~3.3KΩ

6. Derating Curve

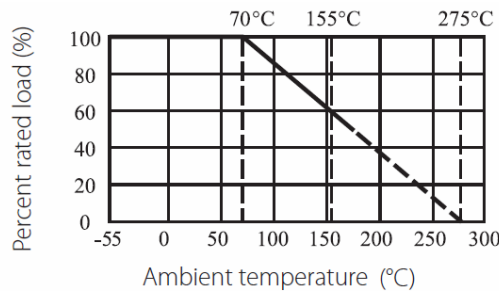

6.1 Voltage rating:


Resistors shall have a rated direct-current (DC) continuous working voltage or an approximate sine-wave root-mean-square (RMS) alternating-current (AC) continuous working voltage at commercial-line frequency and waveform corresponding to the power rating, as determined from the following formula:

$$RCWV = \sqrt{P \times R}$$

Where: RCWV = rated dc or RMS ac continuous working voltage at commercial-line frequency and waveform (VOLT.)

P = power rating (WATT.) R= nominal resistance (OHM)

7. Structure

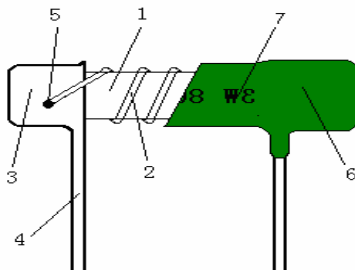

No.	Name	Raw Materials
1	Basic body	Rod type ceramics
2	Alloy wire	Ni-Cr
3	End cap	Steel (Tin plated iron surface)
4	Terminal lug	Steel (Tin plated iron surface)
5	Joint	By welding
6	Coating	Color: Deep Green
7	Marking	Epoxy resin

8. Performance Specification

Characteristic	Limits	Test Method (JIS-C-5201&5202)
Temperature Coefficient	$\geq 20\Omega$: $\pm 300\text{PPM}/^\circ\text{C}$ Max.. $< 20\Omega$: $\pm 400\text{PPM}/^\circ\text{C}$ Max	4.8 Natural resistance changes per temp. Degree centigrade $\frac{R_2 - R_1}{R_1(t_2 - t_1)} \times 10^6 \text{ (PPM}/^\circ\text{C)} \quad \frac{R_3 - R_1}{R_1(t_3 - t_1)} \times 10^6 \text{ (PPM}/^\circ\text{C)}$ R ₁ : Resistance Value at room temperature (t ₁) ; R ₂ : Resistance Value at upper limit temperature $\pm 2^\circ\text{C}$ (t ₂) R ₃ : Resistance Value at lower limit temperature $\pm 3^\circ\text{C}$ (t ₃) Test pattern : Room temperature : (t ₁) Upper limit temperature : (t ₂) Lower limit temperature : (t ₃)
Short-Time Overload	Resistance change rate must be in: $\pm(2\%+0.05\Omega)$, and no mechanical damage.	4.13 Permanent resistance change after the application of a potential of 2.5 times rcwv for 5 seconds.
Terminal strength	No evidence of mechanical damage	4.16 Direct load: Resistance to a 2.5 kg direct load for 10 seconds in the direction of the longitudinal axis of the terminal leads. Twist test: Terminal leads shall be bent through 90° at a point of about 6mm from the body of the resistor and shall be rotated through 360° about the original axis of the bent terminal in alternating direction for a total of 3 rotations.
Resistance to soldering heat	Resistance change rate must be in $\pm(1\%+0.05\Omega)$, and no mechanical damage.	4.18 Permanent resistance change when leads immersed to a point 2.0-2.5mm from the body in $260^\circ\text{C} \pm 5^\circ\text{C}$ solder for 10 ± 1 seconds.
Solderability	95% Coverage Min.	4.17 The area covered with a new, smooth, clean, shiny and continuous surface free from concentrated pinholes. Temperature of solder: $245^\circ\text{C} \pm 3^\circ\text{C}$ Dwell time in solder: 2~3seconds.
Load life in humidity	Resistance change rate must be in $\pm(5\%+0.05\Omega)$, and no mechanical damage.	7.9 resistance change after 1,000 hours (1.5 hours "ON", 0.5 hour "OFF") at RCWV in a humidity test chamber controlled at $40^\circ\text{C} \pm 2^\circ\text{C}$ and 90 to 95% relative humidity.
Load life	Resistance change rate must be in $\pm(5\%+0.05\Omega)$, and no mechanical damage.	4.25.1 permanent resistance change after 1,000 hours operating at RCWV with duty cycle of 1.5 hours "ON", 0.5 hour "OFF" at $70^\circ\text{C} \pm 2^\circ\text{C}$ ambient.
Low Temperature Storage	Resistance change rate must be in $\pm(5\%+0.05\Omega)$, and no mechanical damage.	4.23.4 Lower limit temperature \cdot for 2H.
High Temperature Exposure	Resistance change rate must be in $\pm(5\%+0.05\Omega)$, and no mechanical damage.	4.23.2 Upper limit temperature \cdot for 16H.
Rapid change of temperature	Resistance change rate must be in $\pm(5\%+0.05\Omega)$, and no mechanical damage.	4.19 30 min at lower limit temperature and 30 min at upper limit temperature \cdot 5 cycles.

9. Note

9.1 UNI-ROYAL recommend the storage condition temperature: $15^\circ\text{C} \sim 35^\circ\text{C}$, humidity :25%~75%.

(Put condition for individual product).

Even under UNI-ROYAL recommended storage condition, solderability of products over 1 year old. (Put condition for each product) may be degraded.

9.2 Store / transport cartons in the correct direction, which is indicated on a carton as a symbol.

Otherwise bent leads may occur due to excessive stress applied when dropping of a carton.

9.3 Product performance and soldered connections may deteriorate if the products are stored in the following places:

a. Storage in high Electrostatic.

b. Storage in direct sunshine \cdot rain and snow or condensation.

c. Where the products are exposed to sea winds or corrosive gases, including Cl_2 , H_2S , NH_3 , SO_2 , NO_2 .

10. Record

Version	Description of amendment	Page	Date	Amended by	Checked by
1	First issue of this specification	1~6	Mar.20, 2018	Chen Haiyan	Chen Nana

Uniroyal Electronics Global Co., Ltd. , all rights reserved. Spec. herein would be changed at any time without prior notice